

05-23-00

17

05/22/00  
Jc823 U.S. PTO

## PATENT

Docket No. JCLA5861

Date: 5-22-2000

Page 1

Jc520 U.S. PTO  
09/575890  
05/22/00

ASSISTANT COMMISSIONER FOR PATENTS

WASHINGTON, D.C. 20231

ATTENTION: APPLICATION BRANCH

Sir:

Transmitted herewith for filing is the patent application of

Inventor: Te-Hsiu Tsai; Chiao-Yen Tai

For: DEVICE AND METHOD FOR REPEATEDLY UPDATEING THE FUNCTION  
OF A MONITOR

Enclosed are:

- (x) Specification 20 pages.
- (x) 6 Sheets of drawings
- (x) Recordation Form Cover sheet with 2 pages assignment.
- ( ) A certified copy of Taiwan Patent Application No. \_\_\_\_\_ dated \_\_\_\_\_.
- (x) **SIGNED** declaration and power of attorney.
- (x) Verified statement (Declaration) claiming small entity status.
- (x) Return Prepaid postcard.

CLAIMS AS FILED						
FOR	NUMBER		NUMBER		RATE	FEE
	FILED		EXTRA			
Basic Fee					\$345	\$ 345
Total Claims	27	-20	=7	x	\$9	\$ 63
Independent Claims	3	-3	=0	x	\$39	\$ 0
If application contains any multiple dependent claim (s), then add					\$130	\$ 0
TOTAL FILING FEE						\$ 408

- (x) A check in the amount of \$408 cover the filing fee is enclosed.
- (x) A check in the amount of \$40 to cover the assignment recording fee.
- (x) A duplicate copy of this sheet is enclosed.

*Jiawei Huang*

Jiawei Huang

Registration No. 43,330

**J.C. PATENTS, INC.**  
1340 REYNOLDS AVE., SUITE 114  
IRVINE, CALIFORNIA 92614  
(949)660-0761  
FAX(949) 660-0809



Assistant Commissioner for Patents  
Washington, D.C. 20231


**CERTIFICATE OF MAILING BY "EXPRESS MAIL"**

**Docket No.** : JCLA 5861  
**Applicant(s)** : Te-Hsiu Tsai; Chiao-Yen Tai  
**For** : DEVICE AND METHOD FOR  
REPEATEDLY UPDATEING THE  
FUNCTION OF A MONITOR  
**"Express Mail"**  
**Mailing Label No.** : EL55979017465  
**Date of Deposit** : May 22, 2000

I hereby certify that the accompanying

Transmittal in Duplicate; Specification 20 pages, 6 sheets of drawings; **SIGNED**  
Declaration and Power of Attorney 2 pages; Recordation Form Cover Sheet and  
Assignment 3 pages; Verified Statement (Declaration) Claiming Small Entity Status 1  
page; Checks for Filing Fee(s); Return Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to  
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the  
Assistant Commissioner for Patents, Washington, D.C. 20231.

  
Jiawei Huang

Applicant or Patentee: Novatek Microelectronics Corp.

Attorney's Docket No.: \_\_\_\_\_

Serial or Patent No.: \_\_\_\_\_

Filed or Issued: \_\_\_\_\_

TITLE: DEVICE AND METHOD FOR REPEATEDLY UPDATEING THE FUNCTION OF A MONITOR

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

I hereby declare that I am

☐ the owner of the small business concern identified below:

☒ an official of the small business empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN Novatek Microelectronics Corp.

ADDRESS OF SMALL CONCERN 2F., No. 13, Innovation Road I, Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the business concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement. (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled DEVICE AND METHOD FOR REPEATEDLY UPDATEING THE FUNCTION OF A MONITOR

by inventor(s) (1) Te-Hsiu Tsai (2) Chiao-Yen Tai

described in

☒ the specification filed herewith

☐ application serial no. \_\_\_\_\_, filed \_\_\_\_\_.

☐ patent no. \_\_\_\_\_, issued \_\_\_\_\_.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights in the invention listed below\* and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e). \*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27)

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

NAME \_\_\_\_\_

ADDRESS \_\_\_\_\_

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING Tai-shung Ho

TITLE OF PERSON IF OTHER THAN OWNER Representative

ADDRESS OF PERSON SIGNING 2F., No. 13, Innovation Road I, Science-Based Industrial Park, Hsinchu, Taiwan, R.O.C.

SIGNATURE Tai Shung Ho

DATE May 9, 2000

# DEVICE AND METHOD FOR REPEATEDLY UPDATEING THE FUNCTION OF A MONITOR

## 5 BACKGROUND OF THE INVENTION

### Field of the Invention

The invention relates to a device and a method for repeatedly updating the function of a monitor, and more particularly to a device and a method for repeatedly updating the  
10 function of a monitor by using universal serial bus signal lines for signal transmission.

### Description of the Related Art

In a current monitor system, a monitor controller must be exchanged when function modifying or debugging, resulting in high cost consumed. As to a further advanced monitor system, a corresponding monitor controller has a build-in read only  
15 memory (ROM) which is an erasable programmable read only memory. By updating data stored in the erasable programmable read only memory, function modification and debugging can be achieved.

Referring to Fig. 1, a conventional monitor is shown. The monitor has a total of 18 VGA signal lines electrically coupled to a VGA card, which includes a vertical  
20 synchronous signal (Vsync) line, a horizontal synchronous signal (Hsync) line, a serial data (SDA) line, a serial clock (SCL) line, a ground (Gnd) line, a red (R) line, a green (G) line and a blue (B) line. During a normal operation, a monitor controller 10 having a ROM is electrically coupled to a horizontal and vertical deflection device 20 via a first jumper 14 and to an on screen display 50 via a second jumper 16. The

monitor controller 10 is electrically coupled to the a voltage source (5V) via a power supply jumper 12. The Hsync, Vsync, SDA, SCL and Gnd signal lines are electrically coupled to the monitor controller 10 for driving the horizontal and vertical deflection device 20 according to a received signal and a program stored in the ROM and further  
5 controlling a vertical booster (Vert. Booster) 30 and a horizontal booster (Hori. Booster) 40 for CRT horizontal and vertical controls. A on screen display driving circuit 50 is used to put control ICON to a video pre-amplifier 60. After that, the R, G, B signals are transmitted to a video amplifier 70 from the video pre-amplifier 60 and then displayed on a display (not shown).

10 When it is necessary to modify the function of the monitor system, data stored in the ROM of the monitor controller 10 needs to be updated. First, the case of the monitor must be opened. Then, the first jumper 14 and the second jumper 16 are switched to electrically connect the monitor controller 10 to a recording connector 80 and a voltage source (12V). Next, a ROM writer (not shown) is electrically coupled to  
15 the recording connector 80 for data update.

Referring now to Fig. 2, a conventional system being able to update the function of a monitor is shown. After opening the case of a monitor 100, the recording connector 80 and the VGA signal line 18 can be found on a printed circuit board 110. The first jumper 14, the second jumper 16 and the power supply jumper 12 which can be found  
20 on a jumper region 22 are switched. In a memory recording system 90, a ROM writer 92 is controlled by a computer 94 and a display 96 is used to monitor the condition of recording. Finally, the ROM writer 92 is electrically coupled to the recording connector 80 for recording the ROM of the monitor controller 10 using the computer 94 thereby to update the monitor system.

Obviously, it is really inconvenient to update the monitor system because the case of the conventional monitor must be opened, first and then jumpers are switched for recording the erasable programmable read only memory of the monitor controller 10.

Today, monitors have been speedily developed. Especially, liquid crystal displays have been mass produced. To increase the speeds of the operation of monitors, universal serial bus (hereinafter, referred to as USB) is used for signal transmission. Referring to Fig. 3, a block circuit diagram of a monitor system having USB signal lines is shown. In addition to conventional VGA signal lines 18, USB signal lines 19 are further used to replace serial data and serial clock signals on the VGA signal lines 18. The USB signal lines 19 includes a power source Vcc, a ground Gnd and two data signal lines D+, D-. The data signal lines D+, D- are used to transmit monitor command data. The speed of the USB can be increased up to 1.2M Bps. As a result, the speed of the operation of the monitor can be greatly increased.

Similarly, it causes inconvenience when the monitor system is updated because it is necessary to open the case of the monitor and to switch jumpers for recording the erasable programmable read only memory of the monitor controller 10.

### SUMMARY OF THE INVENTION

The invention is to provide a device and a method for updating the function of a monitor. For a monitor having a USB interface, a USB signal line is used to transmit and record data of a monitor controller to erasable programming read only memory thereby to achieve data update.

A device for updating the function of a monitor according to the invention includes USB signal lines, a detecting device, a starting device, a ROM recording command

decoder, a ROM and a recovery device. The USB signal lines is used to transmute a recording command and recorded data. The detecting device is electrically coupled to the USB signal lines for detecting and outputting the recording command and the recorded data. The starting device is electrically coupled to the detecting device for receiving the recording command and the recorded data and then transmitting the recording command and the recorded data when the starting device is switched from a visual path to a recording path. The ROM recording command decoder is used to convert the recording command into a erase/read/write signal and the recorded data into an address signal and a data signal by switching the starting device to the recording path.

The ROM is electrically connected to the ROM recording command decoder, of which data can be updated according to the address signal, the data signal and the erase/read/write signal. The recovery device is electrically coupled to the ROM recording command decoder and the starting device for determining whether the data stored in the ROM are already updated according to the address signal, the data signal and the read/write signal and for switching the starting device from the recording path to the visual path when the data of the ROM are already updated.

A system for updating the function of a monitor according to the invention includes a recording device, USB signal lines and a monitor controller. The recording device is used to store and output a recording command and recorded data. The USB signal lines are electrically coupled to the recording device for transmitting the recording command and the recorded data. The monitor controller having a monitor in-system programming memory is electrically coupled to the USB signal lines, for modifying the monitor controller according to the recording command and the recorded data.

A method for updating the function of a monitor according to the invention includes the following steps: (a) checking USB multi-setting command check to determine whether the signals on the USB signal lines are correct? (b) setting the monitor into a monitor in-system programming mode? (c) reading and determining a recording command; and (d) reading recorded data and writing the recorded data in a memory and performing step (c) when the recording command is a write command; (e) performing step (a) when the recording command is in a non-monitor in-system programming mode.

10

## BRIEF DESCRIPTION OF THE DRAWINGS

The invention will become more fully understood from the detailed description given hereinafter and the accompanying drawings which are given by way of illustration only, and thus do not limit the present invention, and wherein:

Fig. 1 is a block circuit diagram of a conventional monitor;

15

Fig. 2 is a schematic view of a conventional system being able to update the function of a monitor ;

Fig. 3 is a block circuit diagram of a monitor system having USB signal lines;

Fig. 4 is a block circuit diagram of a monitor according to the invention;

20

Fig. 5 is a schematic view of a system for updating the function of a monitor using a USB interface according to the invention;

Fig. 6 is a block circuit diagram showing a monitor controller of Fig. 3;

Fig. 7 is a block circuit diagram showing a detecting device of Fig. 6;

Fig. 8 is a block circuit diagram showing a starting device of Fig. 6;

Fig. 9 is a block circuit diagram showing a ROM recording command decoding



device of Fig. 6;

Fig. 10 is a block circuit diagram showing a recording command decoder of Fig. 9;

Fig. 11 is a block circuit diagram showing a recovery device of Fig. 6; and

Fig. 12 is a flow chart showing a method for updating the function of a monitor  
5 according to the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Fig. 4, a monitor according to the invention is shown. VGA signal  
lines 18 and USB signal lines 19 are electrically coupled to a monitor controller 180  
10 having a monitor in system programming ROM (not shown). According to a received  
signal and a program stored in the ROM, a horizontal and vertical deflection device 120  
can be drove to control a vertical booster 130 and a horizontal booster 140 for CRT  
horizontal and vertical control.

When it is necessary to modify the function of the monitor system, data stored in  
15 the ROM of the monitor controller 180 needs to be updated. Compared to the prior art,  
it is unnecessary to open the case of the monitor. In other words, the function update  
of the monitor can be achieved by just using the USB signal lines 19.

Fig. 5 shows a system for updating the function of a monitor using a USB interface  
according to the invention. On a printed circuit board 210 of a monitor 200, USB  
20 signal lines 19 are electrically coupled to a recording device 190. First, a recording  
command and data are written into a computer 194. Thereafter, the recording  
command and data are converted into a form of USB, and then written into the ROM of  
a monitor controller 180 via the USB signal lines 19 from a USB connector 192.

The recording device 190 can also be replaced by a USB interface circuit stage.

Similarly, a recording command and data are written into the memory region of the USB interface circuit stage. Then, the recording command and recorded data are written into the monitor controller 180 directly in a form of USB via the USB signal lines 19 for data update.

5 In detail, the D+, D- signal lines of the USB signal lines 19 are used to transmit the recording command and data in a form of USB.

Referring to Fig. 6, the monitor controller 180 of Fig. 3 is shown. The monitor controller 180 includes a detecting device 300, a starting device 400, a ROM recording command decoding device 500, a recovery device 600, a ROM 800 and other circuits  
10 700.

The detecting device 300 is electrically coupled to the USB signal lines 19 for detecting whether the recording command and data are transmitted from the USB signal lines 19. If detected, a corresponding signal is sent to the starting device 400.

The starting device 400 has a visual path and a recording path. When recording is  
15 performed, the recording command and recorded data are transmitted to the ROM recording command decoding device 500 via the recording path from the starting device 400. In a normal condition, general visual data are transmitted to other circuits 700 by switching the starting device 400 to the visual path for display.

The ROM recording command decoding device 500 is used to convert the  
20 recording command into an erase/read/write signal and the recorded data into an address signal and a data signal. Then, the address signal, the data signal and the erase/read/write signal are transmitted to the ROM 800 for data update.

The ROM 800 is a flash ROM or an electrically erasable programmable ROM (EPROM). Data stored in the ROM 800 is used for updating the function of the

monitor. According to the received address signal, data signal and erase/read/write signal, data update of the ROM 800 can be achieved.

The recovery device 600 is electrically coupled to the ROM recording command decoding device 500 and the starting device 400 and is used to determine whether the data update is completely achieved. After the data update is completely achieved, the starting device 400 is switched to the recording path from the visual path.

Next, each device will be described in detail as follows:

Referring to Fig. 7, the block circuit diagram of the detecting device 300 of Fig. 6 is shown. A USB multi-setting command checking circuit 310 of the detecting device 300 is used to check serial setting commands on the data signal lines D+, D-. After determining that the serial setting commands are correct, a setting signal is sent to a monitor in-system programming control flag 320. When the monitor in-system programming control flag 320 receives the setting signal, recording is formally performed and meanwhile a monitor in-system programming start signal is sent to the starting device 400, in a monitor in-system programming mode.

Referring to Fig. 8, the starting device 400 of Fig. 6 is shown. When a monitor in-system programming reset generator 410 receives a monitor in-system programming starting (MISP\_START) signal, a selecting signal is generated and transmitted to a recording path separator 420 to switch the recording path separator 420 to the recording path from the visual path. Then, the recording command and the recorded data are sent out via the recording path.

Referring to Fig. 9, the ROM recording command decoding device 500 of Fig. 6 is shown. A USB interface circuit of the ROM recording command decoding device 500 receives the recording command and the recorded data coming from the starting device

400 and then converts them into another recording command and recorded data compatible to a recording command decoder 520. The recording command decoder 520 receives the converted recording command and recorded data and further converted them into an address signal and a data signal and an erase/read/write signal. Then, the address signal, data signal and erase/read/write signal are sent to the ROM 800 to achieve data update.

Referring to Fig. 10, the recording command decoder 520 of Fig. 9 is shown. The recording command decoder includes a hidden ROM 522, a RAM 526, a CPU 524 and a recording control recorder 528.

The hidden memory 522 is used to store the program codes of the recording command. The RAM 526 can access the recorded data. The CPU 524 receives the USB interface circuit-converted recording command and recorded data and then store them in the RAM 526. The recording command are decoded according to the program codes of the hidden ROM 522 and then transmits them to the recording control recorder 528. When receiving the decoded recording command, the recording control recorder 528 converts them into an interface control signal, namely, the erase/read/write signal. Thereafter, the recorded data stored in the RAM 526 are converted into an address signal and a data signal by the CPU 524.

The recording command decoder 520 can be replaced with a hardware circuit. Similarly, a recording command received by the USB circuit can be decoded by dividing them into various states. And, the recording command and the recorded data are converted into an erase/read/write signal, an address signal and a data signal.

Referring to Fig. 11, the recovery device 600 of Fig. 6 is shown. In Fig. 6, a recovery control recorder 620 receives the address signal, the data signal and the

read/write signal and transmits a recovery signal to a recovery reset circuit 610 after recording is achieved. When the recovery reset circuit 610 receives the recovery signal, it sends a monitor in-system programming stop (MISP\_STOP) signal to the starting device 400, thereby switching the starting device 400 from the recording path to  
5 the visual path.

A method for updating the function of a monitor according to the invention shown in Fig. 12 will be described in the following.

First, in Step 1, whether a monitor operates normally is detected. If the monitor operates normally, Step 1 is continuously performed.

10 When the monitor operates abnormally, Step 2 is performed to determine whether the signals on the USB signal lines are correct by a USB multi-setting command check. If the USB multi-setting command is incorrect, the process returns to Step 1. If the USB multi-setting command is correct, Step 3 is performed to set the monitor to a monitor in-system programming mode.

15 Next, Step 4 is performed to read a recording command and determine whether the recording command is in a non-monitor in-system programming mode. When the recording command is a write command, the recording command is read and then written into a memory, and the recording command is re-read. If the recording command is in a non-monitor in-system programming mode, go to step 1 to detect  
20 whether the monitor operates normally.

Accordingly, the invention is to provide a device and a method for updating the function of a monitor. By using the USB signal lines directly for data transmission and recording the data of the monitor controller to the erasable programmable read only memory, data update can be achieved.

While the invention has been described by way of example and in terms of the preferred embodiment, it is to be understood that the invention is not limited to the disclosed embodiments. On the contrary, it is intended to cover various modifications and similar arrangements as would be apparent to those skilled in the art. Therefore,

5 the scope of the appended claims should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements.

WHAT IS CLAIMED IS:

1. A device for updating the function of a monitor, comprising:

USB signal lines for transmitting a recording command and recorded data;

a detecting device electrically coupled to the USB signal lines for detecting and  
5 outputting the recording command and the recorded data;

a starting device electrically coupled to the detecting device for receiving the  
recording command and the recorded data and then transmitting the recording command  
and the recorded data when the starting device is switched from a visual path to a  
recording path;

10 a ROM recording command decoder for converting the recording command into a  
erase/read/write signal and the recorded data into a address signal and a data signal by  
switching the starting device to the recording path;

a ROM electrically connected to the ROM recording command decoder, of which  
data can be updated according to the address signal, the data signal and the  
15 erase/read/write signal; and

a recovery device electrically coupled to the ROM recording command decoder  
and the starting device for determining whether the data stored in the ROM are already  
updated according the address signal, the data signal and the read/write signal and for  
switching the starting device from the recording path to the visual path when the data of  
20 the ROM are already updated.

2. The device for updating the function of a monitor as claimed in claim 1,  
wherein the USB signal is electrically coupled to a recording device for transmitting the  
recording command and the recorded data.

3. The device for updating the function of a monitor as claimed in claim 2,

wherein the recording device is a computer stage for transmitting the recording command and the recorded data through a USB in a form of USB.

4. The device for updating the function of a monitor as claimed in claim 2, wherein the recording device is a USB interface circuit stage for transmitting the recording command and the recorded data in a form of USB.

5. The device for updating the function of a monitor as claimed in claim 1, wherein the detecting device comprises:

a USB multi-address checking circuit electrically coupled to the USB signal lines for checking a serial setting commands of the recorded data and then transmitting a setting signal when the checked serial setting commands are correct; and

a monitor in-system programming (MISP) flag electrically coupled to the USB multi-address checking circuit for transmitting a monitor in-system programming starting signal according to the setting signal.

6. The device for updating the function of a monitor as claimed in claim 1, wherein the starting device comprises:

a monitor in-system programming reset generating circuit for generating a selecting signal according to the monitor in-system programming starting signal; and

a recording path separator switched from the visual path to the recording path according to the selecting signal and transmitting the recording command and the recorded data via the recording path.

7. The device for updating the function of a monitor as claimed in claim 1, wherein the ROM recording command decoding device comprises:

a USB interface circuit for receiving and converting the recording command and the recorded data; and



a recording command decoder for receiving the converted recording command and the recording data and transmitting the address signal, the data signal and the erase/read/write signal.

8. The device for updating the function of a monitor as claimed in claim 7,  
5 wherein the recording command decoder comprises:

a hidden ROM for storing the program codes of the recording command;

a RAM for storing the recording data;

a CPU electrically coupled to the hidden ROM, the RAM and the USB interface circuit for receiving the USB interface circuit-converted recording command and  
10 recorded data, storing the recorded data in the RAM, decoding the recording command according to the program code of the hidden ROM and then sending the decoded recording command; and

a recording control recorder electrically coupled to the CPU for receiving the decoded recording command and converting the decoded recording command into an  
15 erase/read/write signal and sending the recorded data stored in the RAM according to the address signal and the data signal.

9. The device for updating the function of a monitor as claimed in claim 7,  
wherein the function of the recording command decoder can be achieved by a hardware circuit which can divide the recording command received by the USB circuit into a  
20 plurality of states to perform the function of decoding and convert the recording command and the recorded data into the erase/read/write signal, the address signal and the data signal.

10. The device for updating the function of a monitor as claimed in claim 1,  
wherein the recovery device further comprises:

a recovery control recorder for receiving the address signal, the data signal and the erase/read/write signal and transmitting a recovery signal after recording is achieved; and

a recovery reset circuit electrically coupled to the recovery control recorder and the starting device for transmitting a monitor in-system programming stop signal to switch the starting device from the recording path to the visual path when receiving the recovery signal.

11. The device for updating the function of a monitor as claimed in claim 1, wherein the ROM is a flash ROM.

12. The device for updating the function of a monitor as claimed in claim 1, wherein the ROM is an electrically erasable programmable read only memory.

13. A system for updating the function of a monitor, comprising:

a recording device for storing and outputting a recording command and recorded data;

USB signal lines electrically coupled to the recording device for transmitting the recording command and the recorded data; and

a monitor controller having a monitor in-system programming memory, electrically coupled to the USB signal lines, for modifying the monitor controller according to the recording command and the recorded data.

14. The system for updating the function of a monitor as claim in claim 13, wherein the recording device is a computer stage for transmitting the recording command and the recorded data in a form of USB via a USB connector.

15. The system for updating the function of a monitor as claimed in claim 13, the recording device is a USB interface circuit stage for transmitting the recording

command and the recorded data in a form of USB.

16. The system for updating the function of a monitor as claimed in claim 13, wherein the monitor controller further comprises:

a detecting device electrically coupled to the USB signal lines for detecting and outputting the recording command and the recorded data;

a starting device electrically coupled to the detecting device for receiving the recording command and the recorded data and then transmitting the recording command and the recorded data when the starting device is switched from a visual path to a recording path;

a ROM recording command decoder for converting the recording command into a erase/read/write signal and the recorded data into a address signal and a data signal by switching the starting device to the recording path;

a ROM electrically connected to the ROM recording command decoder, of which data can be updated according to the address signal, the data signal and the erase/read/write signal; and

a recovery device electrically coupled to the ROM recording command decoder and the starting device for determining whether the data stored in the ROM are already updated according the address signal, the data signal and the read/write signal and for switching the starting device from the recording path to the visual path when the data of the ROM are already updated.

17. The system for updating the function of a monitor as claimed in claim 16, wherein the detecting device further comprises:

a USB multi-address checking circuit electrically coupled to the USB signal lines for checking a serial setting commands of the recorded data and then transmitting a

setting signal when the checked serial setting commands are correct; and

a monitor in-system programming (MISP) flag electrically coupled to the USB multi-address checking circuit for setting the monitor to a monitor in-system programming control mode according to the setting signal and transmitting a monitor in-system programming starting signal.

18. The system for updating the function of a monitor as claimed in claim 16, wherein the starting device further comprises:

a monitor in-system programming reset generating circuit for generating a selecting signal according to the monitor in-system programming starting signal; and

a recording path separator switched from the visual path to the recording path according to the selecting signal and transmitting the recording command and the recorded data via the recording path.

19. The system for updating the function of a monitor as claimed in claim 16, wherein the ROM recording command decoding device comprises:

a USB interface circuit for receiving and converting the recording command and the recorded data; and

a recording command decoder for receiving the converted recording command and the recording data and transmitting the address signal, the data signal and the erase/read/write signal.

20. The system for updating the function of a monitor as claimed in claim 19, wherein the recording command decoder comprises:

a hidden ROM for storing the program codes of the recording command;

a RAM for storing the recording data;

a CPU electrically coupled to the hidden ROM, the RAM and the USB interface

circuit for receiving the USB interface circuit-converted recording command and recorded data, storing the recorded data in the RAM, decoding the recording command according to the program code of the hidden ROM and then sending the decoded recording command; and

5           a recording control recorder electrically coupled to the CPU for receiving the decoded recording command and converting the decoded recording command into an erase/read/write signal and sending the recorded data stored in the RAM according to the address signal and the data signal.

10           21. The system for updating the function of a monitor as claimed in claim 19, wherein the function of the recording command decoder can be achieved by a hardware circuit which can divide the recording command received by the USB circuit into a plurality of states to perform the function of decoding and convert the recording command and the recorded data into the erase/read/write signal, the address signal and the data signal.

15           22. The system for updating the function of a monitor as claimed in claim 16, wherein the recovery device further comprises:

          a recovery control recorder for receiving the address signal, the data signal and the erase/read/write signal and transmitting a recovery singal after recording is achieved; and

20           a recovery reset circuit electrically coupled to the recovery control recorder and the starting device for transmitting a monitor in-system programming stop signal to switch the starting device from the recording path to the visual path when receiving the recovery signal.

          23. The system for updating the function of a monitor as claimed in claim 16,

wherein the ROM is a flash ROM.

24. The system for updating the function of a monitor as claimed in claim 16, wherein the ROM is an electrically erasable programmable read only memory.

25. A method for updating the function of a monitor, comprising the steps of:

5 (a) performing a USB multi-setting command check to determine whether the signals on the USB signal lines are correct?

(b) setting the monitor into a monitor in-system programming mode?

(c) reading and determining a recording command; and

10 (d) reading recorded data and writing the recorded data in a memory and performing step (c) when the recording command is a write command;

(e) performing step (a) when the recording command is in a non-monitor in-system programming mode.

26. The method for updating the function of a monitor as claimed in claim 25, wherein step (a) is performed only when the monitor operates abnormally.

15 27. The method for updating the function of a monitor as claimed in claim 25, wherein the monitor is in a normal visual transmission mode when the checked signals on the USB signal lines are incorrect.

## ABSTRACT OF THE DISCLOSURE

A device and a method for updating the function of a monitor according to the invention. By using the USB signal lines directly for data transmission and recording the data of a monitor controller to the erasable programmable read only memory, data  
5 update can be achieved. Moreover, the erasable programmable read only memory can be updated by separating the recording path and the normal visual path using a recording path separator of the monitor controller. Compared to the prior art, the device and the method of the invention are more convenient and time saving for function update of the monitor.

5861USF.RTF

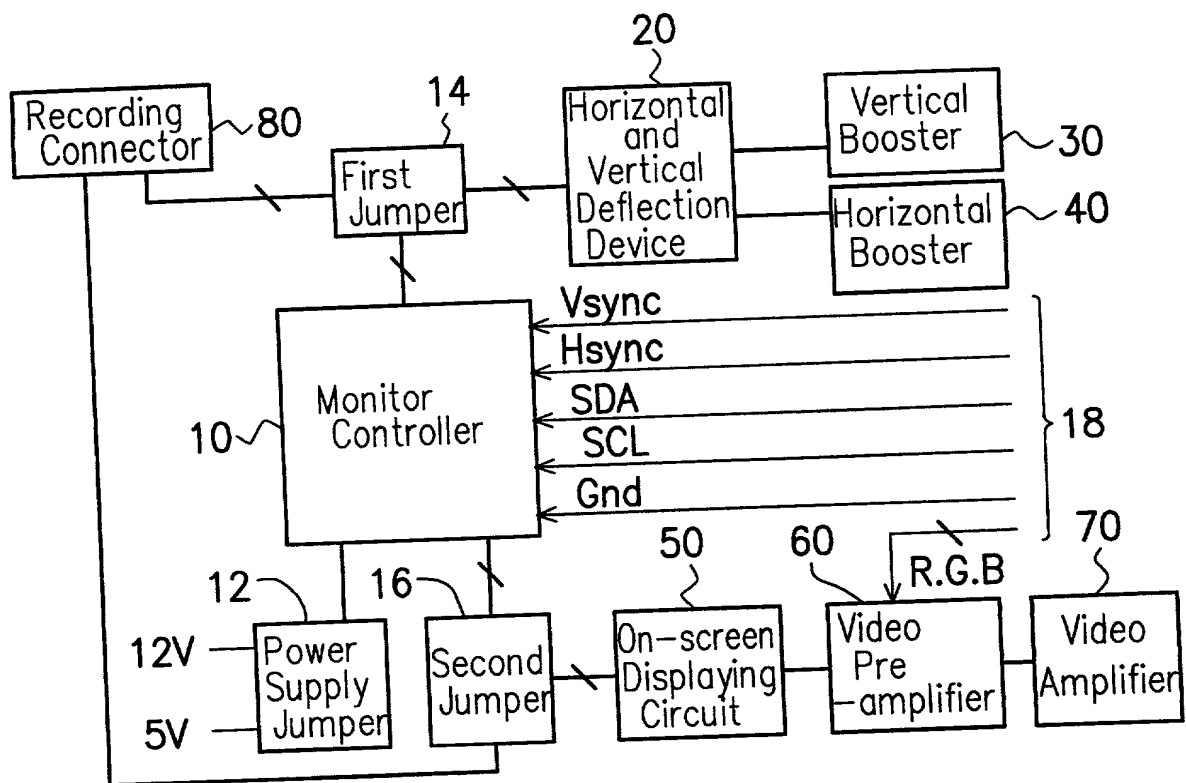


FIG. 1 (PRIOR ART)

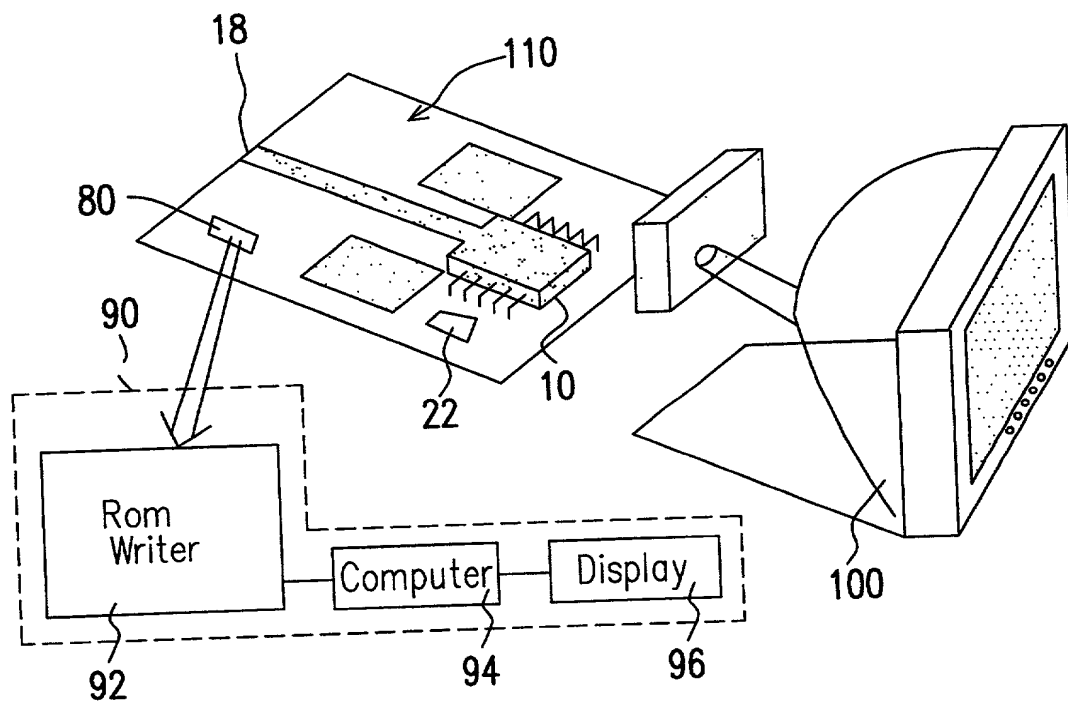


FIG. 2 (PRIOR ART)



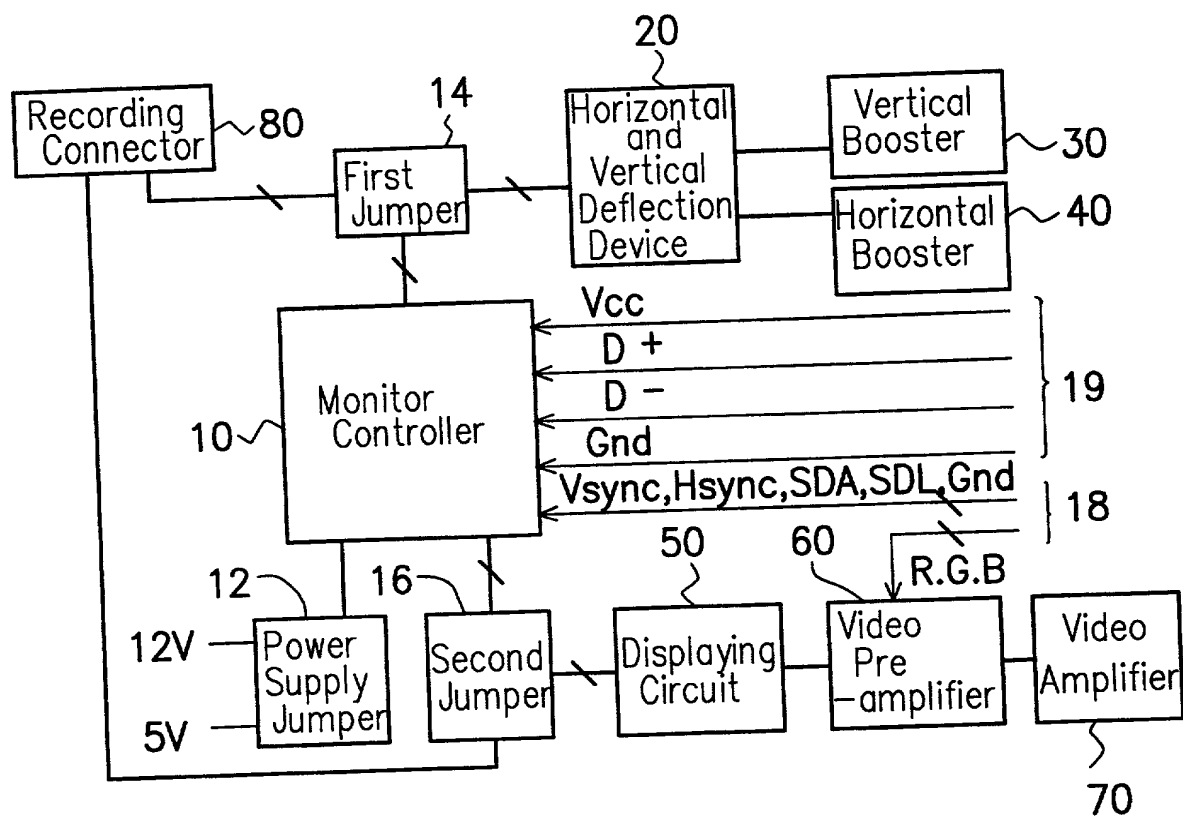


FIG. 3 (PRIOR ART)

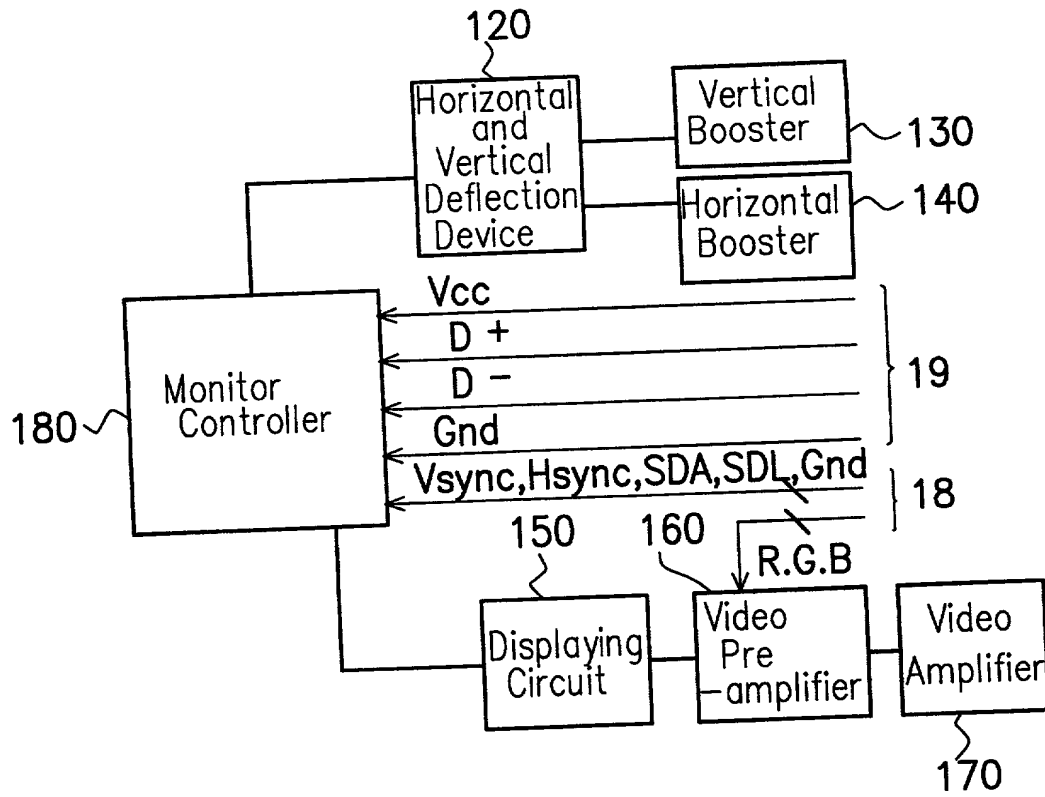


FIG. 4

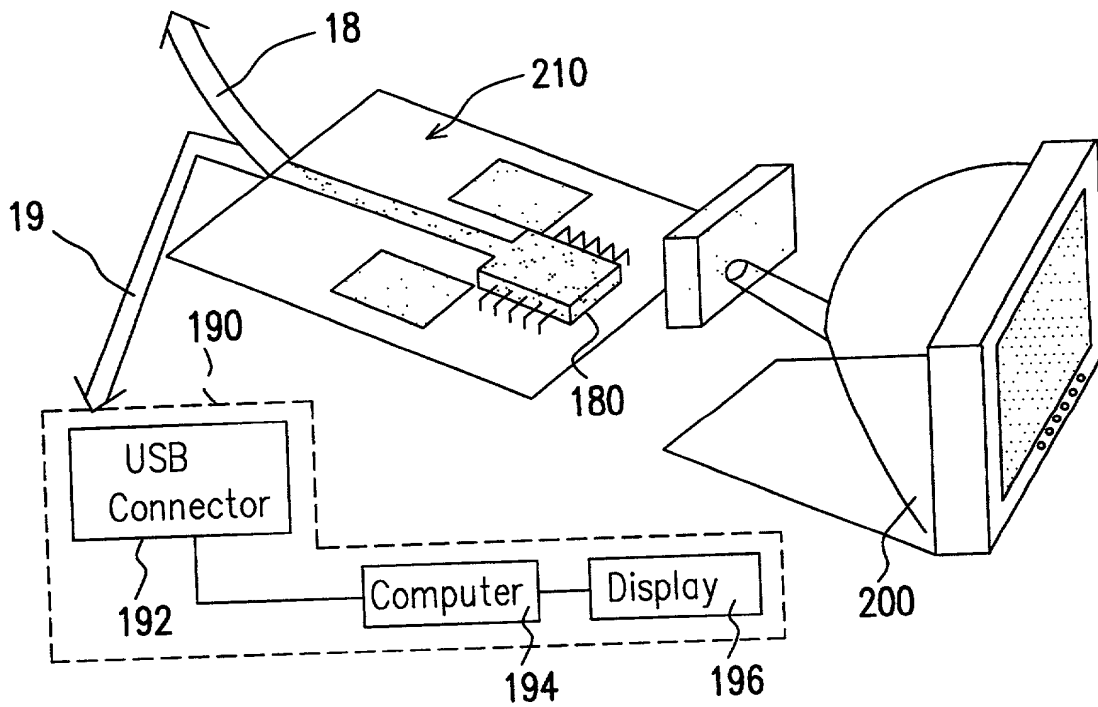


FIG. 5

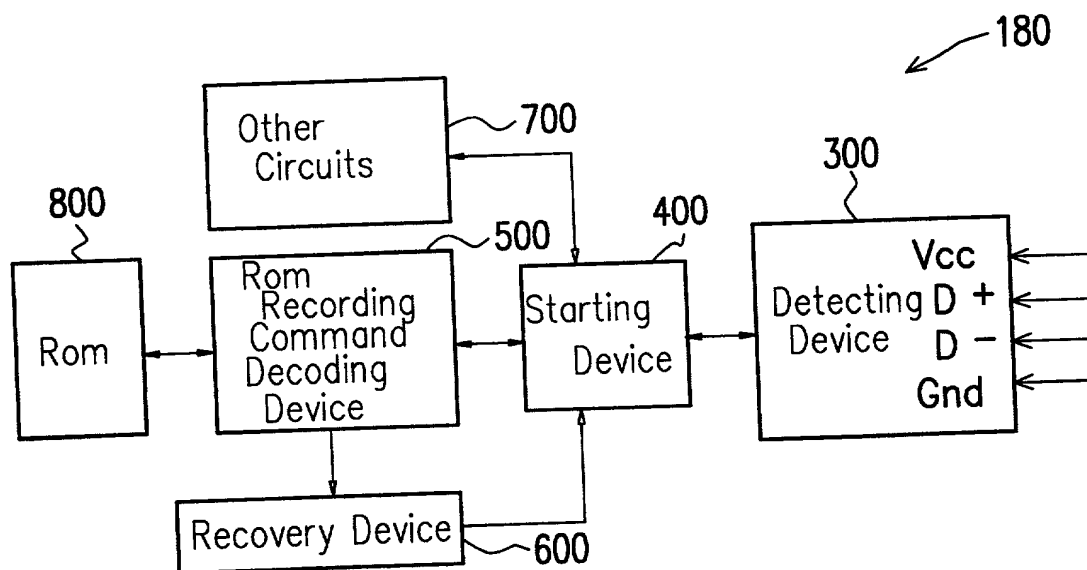


FIG. 6

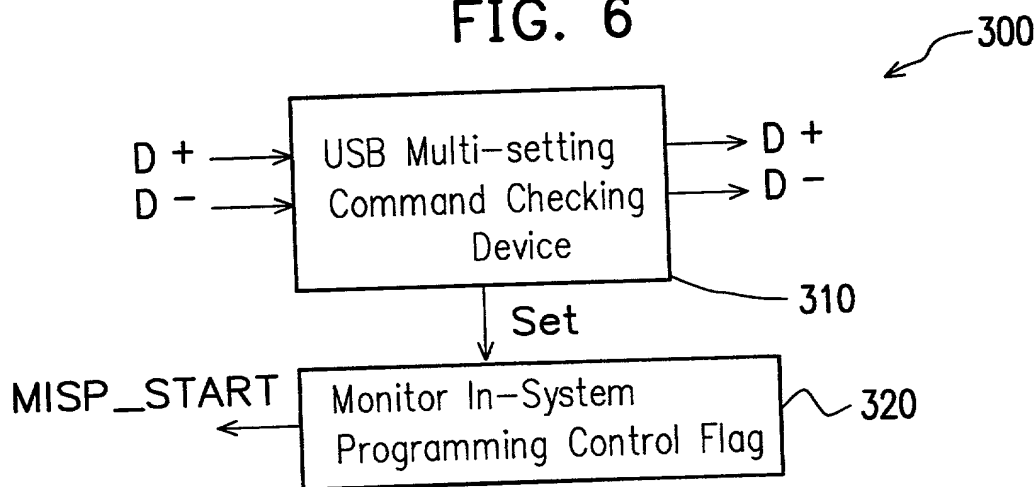


FIG. 7

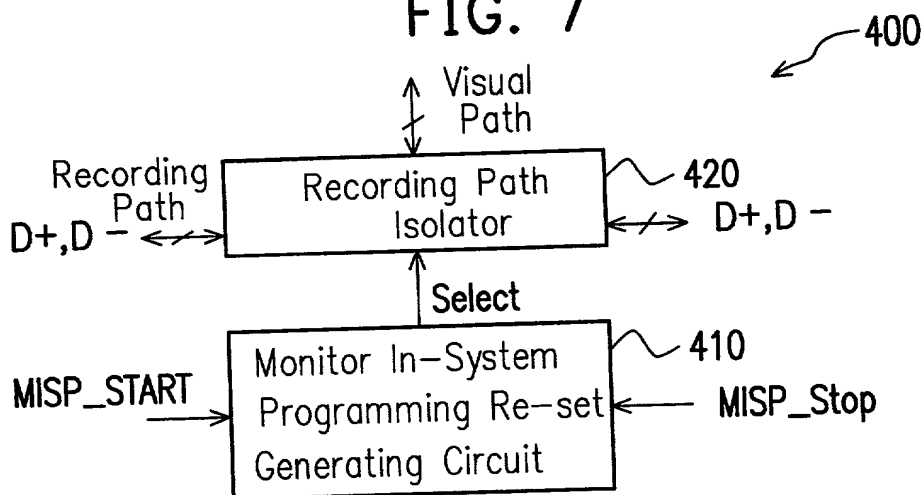


FIG. 8

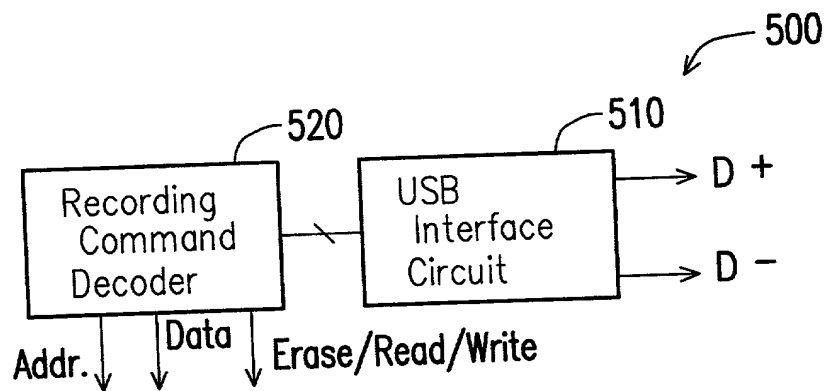


FIG. 9

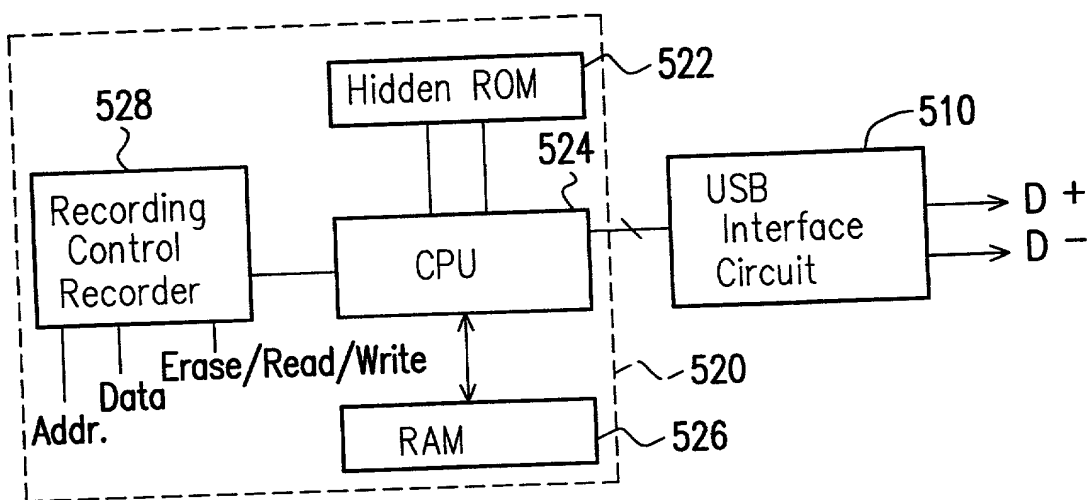


FIG. 10

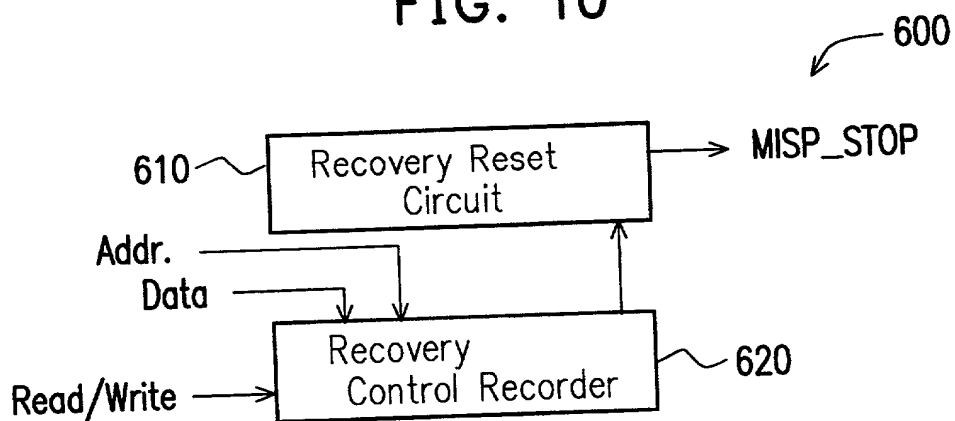


FIG. 11

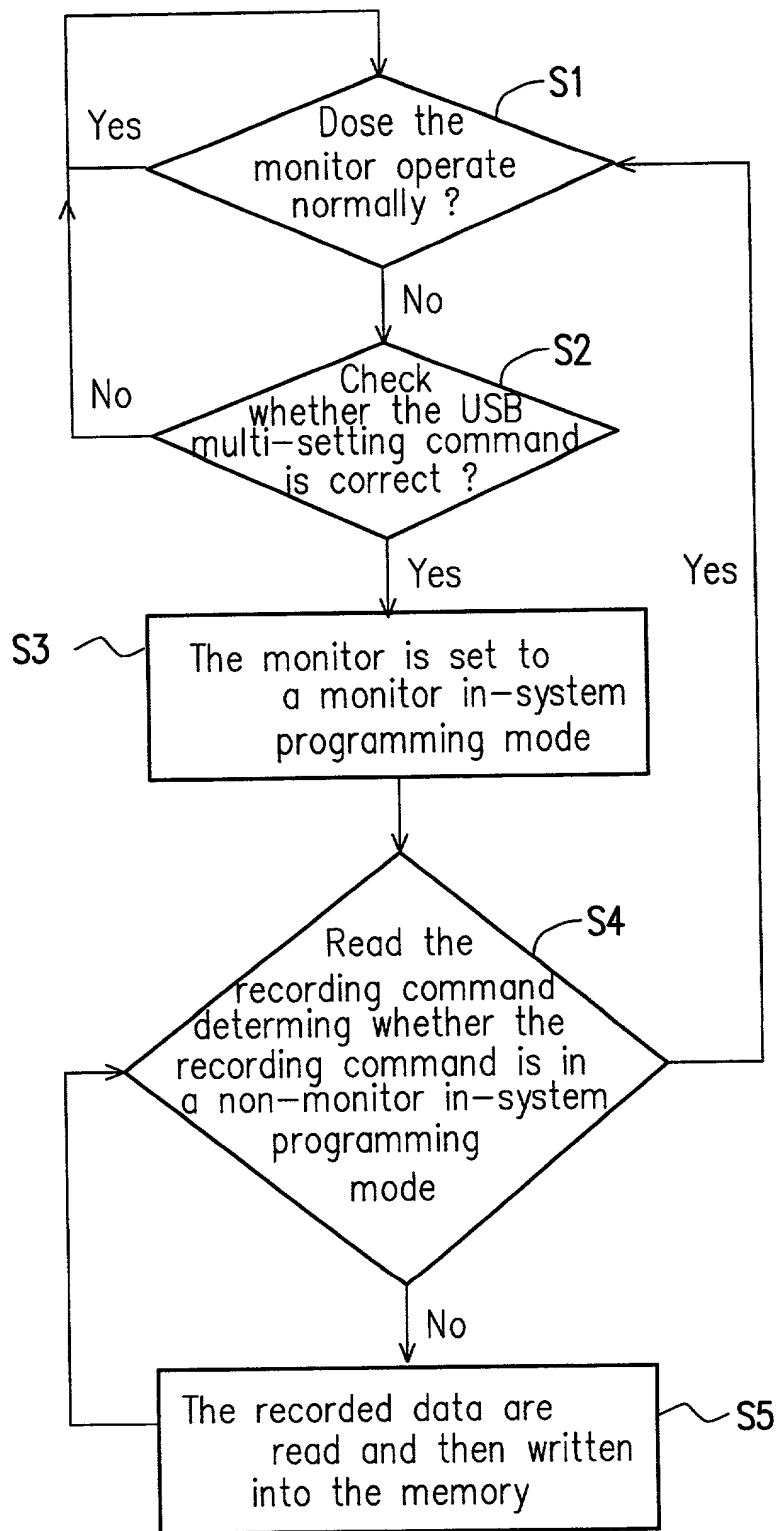


FIG. 12

## COMBINED DECLARATION AND POWER OF ATTORNEY

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name and that I believe I am an original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### DEVICE AND METHOD FOR REPEATEDLY UPDATEING THE FUNCTION OF A MONITOR

the specification of which

  X   is attached hereto.

       was filed on                     

as Application Serial No.                      and was amended on                     .

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, Untied States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Number	Country	Date Filed(yyyy/mm/dd)	Yes	No
				X

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

**Jiawei Huang** (Reg. No. 43,330)  
**Maria Erlinda C. Sarno** (Reg. No. 37,436)

**Charles C.H. Wu** (Reg. No. 39,081)  
**Chanette Armstrong** (Reg. No. 44,011)

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:  
(Name and telephone number)

J.C. Patents, Inc.  
1340 Reynolds Ave., Suite 114,  
Irvine, CA 92614  
(949) 660-0761

Jiawei Huang  
(949) 660-0762

## COMBINED DECLARATION AND POWER OF ATTORNEY CONTINUED

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Signature: Te Hsiu Tsai

Date: 2000, 5, 3

Sole or First Joint Inventor: Te-Hsiu Tsai

Citizenship: Taiwan, R.O.C.

Residence and Post Office Address: 4Fl., No. 197, Sec. 1, Li-Nung St., Peitou District, Taipei, Taiwan, R.O.C.

Signature: Chiao Yen Tai

Date: 2000.5.3

Second Joint Inventor (if any): Chiao-Yen Tai

Citizenship: Taiwan, R.O.C.

Residence and Post Office Address: No. 22, Alley 2, Lane 365, Hsin-Hsiang St., Hsiangshan, Hsinchu, Taiwan, R.O.C.